Leading Innovation >>>>

ST-A10 POS SystemInnovative, Stylish and Affordable POS terminal for your retail environment



Leading Innovation >>>>

Toshiba ST-A10 POS System

Highlights


- Innovative design for the mass retail market
- New compact design which incorporate a small foot-print.
- Spill proof design
- Screw-less cover for easy maintenance
- Affordable and price competitive
- Combines extensive service support from Toshiba TEC Australia

Target markets

- Hospitality (Hotels, Restaurants, Pubs, Bars)
- Pharmacy retail stores
- Specialty retail stores
- Convenience retail stores
- Quick service retail stores
- Grocery stores

Innovative Design

The Toshiba ST-A10 is a low cost POS terminal which is designed for the mass market. The sleek ST-A10 delivers serviceability and state-of-theart technology needed at the

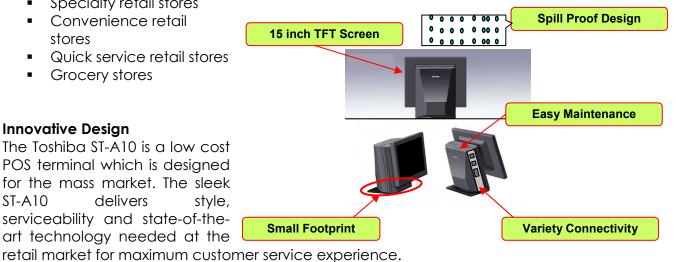

Space Saving Small Foot-Print

The system has a relative small foot-print (244Wx185Dx339H) which fits into any tight retail environment, thus saving the retailer precious space over the POS counter.


Spill Proof Design and Easy Maintenance

The robust design of the Toshiba ST-A10 complies with the IEC60529 international standard that describes a system to classify the degrees of protection provided by enclosures of electronic equipment. It is tested extensively against dripping water. For essential maintenance, the system is designed for tool-less environment, enabling quick replacement and reduces service down-time.

Affordable and Price Competitive

Designed with the mass retail market in mind, the ST-A10 is priced very competitively, making it one the most versatile and affordable POS system in the market.

Leading Innovation >>>>

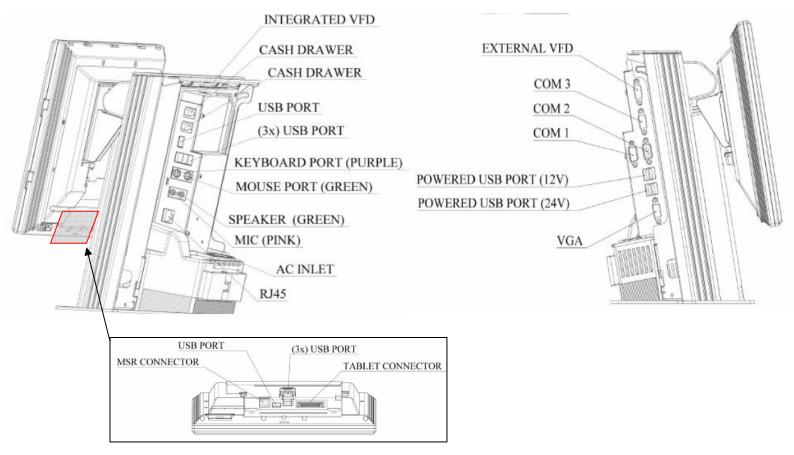



Leading Innovation >>>>

Technical Specifications		
Model		ST-A10
CPU		VIA C7 1.5GHz
System Memory		2 slots (DDR2), 256MB expandable to 2GB (Max)
Hard Disk		40GB (3.5 inch) serial ATA
Operating System		Microsoft Windows 2000 / XP Pro / Linux
Display		
LCD Size		15" TFT Resistive Touch Panel, 5 Wire
Resolution		1024 x 768
I/O Ports	1	
Interface	LAN	10/100Base TX (RJ-45 modular connector)
	Audio	MIC/Headphone connector
	PS/2	2 port (MINI-DIN 6-pin)
	COM1	D- SUB 9 Pin STD Male
	COM2	D- SUB 9 Pin STD Male
	COM3	D- SUB 9 Pin Powered+5V,+12V (Female)
	COM4	D- SUB 9 Pin (for External VFD)
	USB1	USB 1
	USB2	USB 2
	USB3	USB 3
	USB4	USB 4
	USB5	USB 5
	USB6	USB 6
	Powered USB7	24V USB
	Drawer	2 ports (Modular type, fitted with the drive circuit)
	2 nd VGA Output	DE15 (15-pin)
Mechanical Environment		<u>, </u>
Dimension (W x D x H) mm		244 x 185 x 339
Optional Devices		
Customer Display		Customer 2-Line display (fixed type) LIUST-A10-FAK-QM-R
		Customer 2-Line display (Tilt type) LIUST-A10-BAK-QM-R
		Customer 2-Line display (Remote type) LIUST-A10-RAK-QM-R
Magnetic Card Reader		MCRST-A10-BTNK-QM-R
i-Button option module Wireless LAN cover		KITST-A10-BTNK-QM-R

Information and specifications in catalogue are subject to change without notice

TOSHIBA TEC AUSTRALIA PTY LTD

Unit 1, 9-11 South Street, Rydalmere, NSW 2116 Phone: (02) 8845 6211, Fax: (02) 9680 0892

Web: www.toshibatec.com.au